


# Swing-Up Fitting

## E-Z Open


- For wood or aluminum doors
- Can be used for a face frame application
- Smooth motion and stopping
- Secure holding in open and closed positions
- 110° concealed hinges and mounting plates are required for installation, see pages **219 - 223** and **242 - 249**
- Aluminum Frames are on page **256**







### Spring

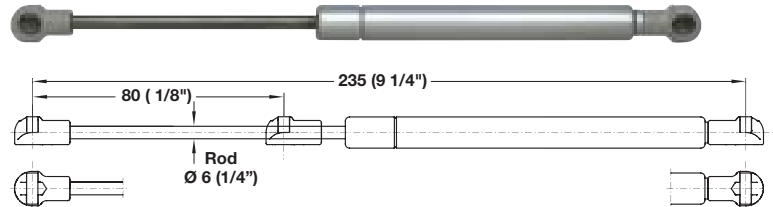

### Door bracket



### Cabinet bracket

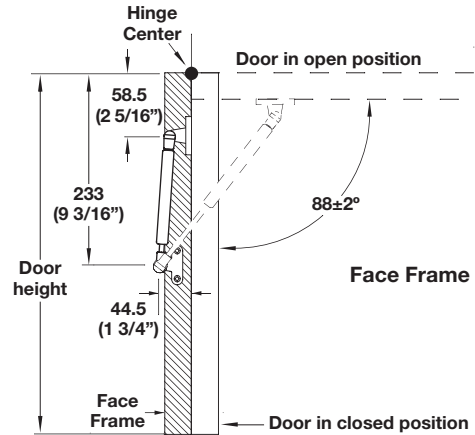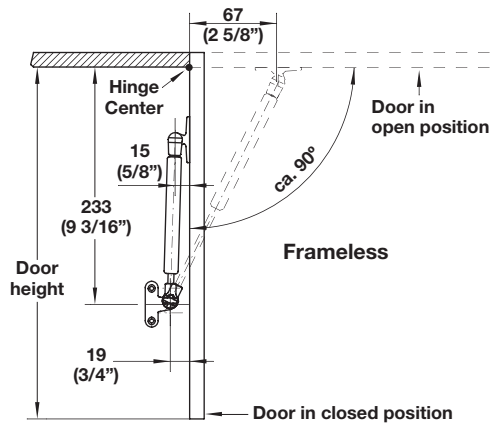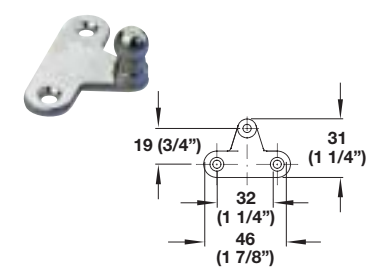

**Door mounting bracket** (optional)  
For aluminum frame profiles of less than 35 mm (1 3/8") wide. Recommended for aluminum frames series 563.00, 563.01, and 563.04.

Item No.
373.70.900

Packing: 250 pcs.

### Lid stay 100 N (22 1/2 lbs.)

For wood doors or aluminum frames of 35 mm (1 3/8") profile width or wider.  
Material: steel



Finish	Item No.
silver	373.71.901

Packing: 30 sets (1 set = 2 springs, 2 cabinet brackets, and 2 door brackets.)

### Lid stay 150 N (33.7 lbs.)

For wood doors or aluminum frames of 35 mm (1 3/8") profile width or wider.  
Material: steel



Finish	Item No.
silver	373.71.902

Packing: 30 sets (1 set = 2 springs, 2 cabinet brackets, and 2 door brackets.)

Door height mm	inch	Door Weight			
		2 – 3 kg. 5 – 7 lbs.	3.5 – 4.5 kg. 8 – 10 lbs.	5 – 6 kg. 11 – 13 lbs.	6.5 – 9 kg. 14 – 20 lbs.
254–305	(10-12")	373.71.901	373.71.901	373.71.901	373.71.902
330–380	(13-15")	373.71.901	373.71.901	373.71.901	—
406–457	(16-18")	373.71.901	373.71.901	373.71.902	—
483–533	(19-21")	373.71.901	373.71.902	—	—
559–610	(22-24")	373.71.901	373.71.902	—	—

The values indicated are guidelines only. Trial application is recommended. Guidelines are based on two lid stays per door.

Dimensions in mm. Inches are approximate. Dimensional data not binding. We reserve the right to alter specifications without notice.